


NOTE: REFER TO
WINDOW HEAD: SS08RUAC030
WINDOW JAMB: SS08RUAC040

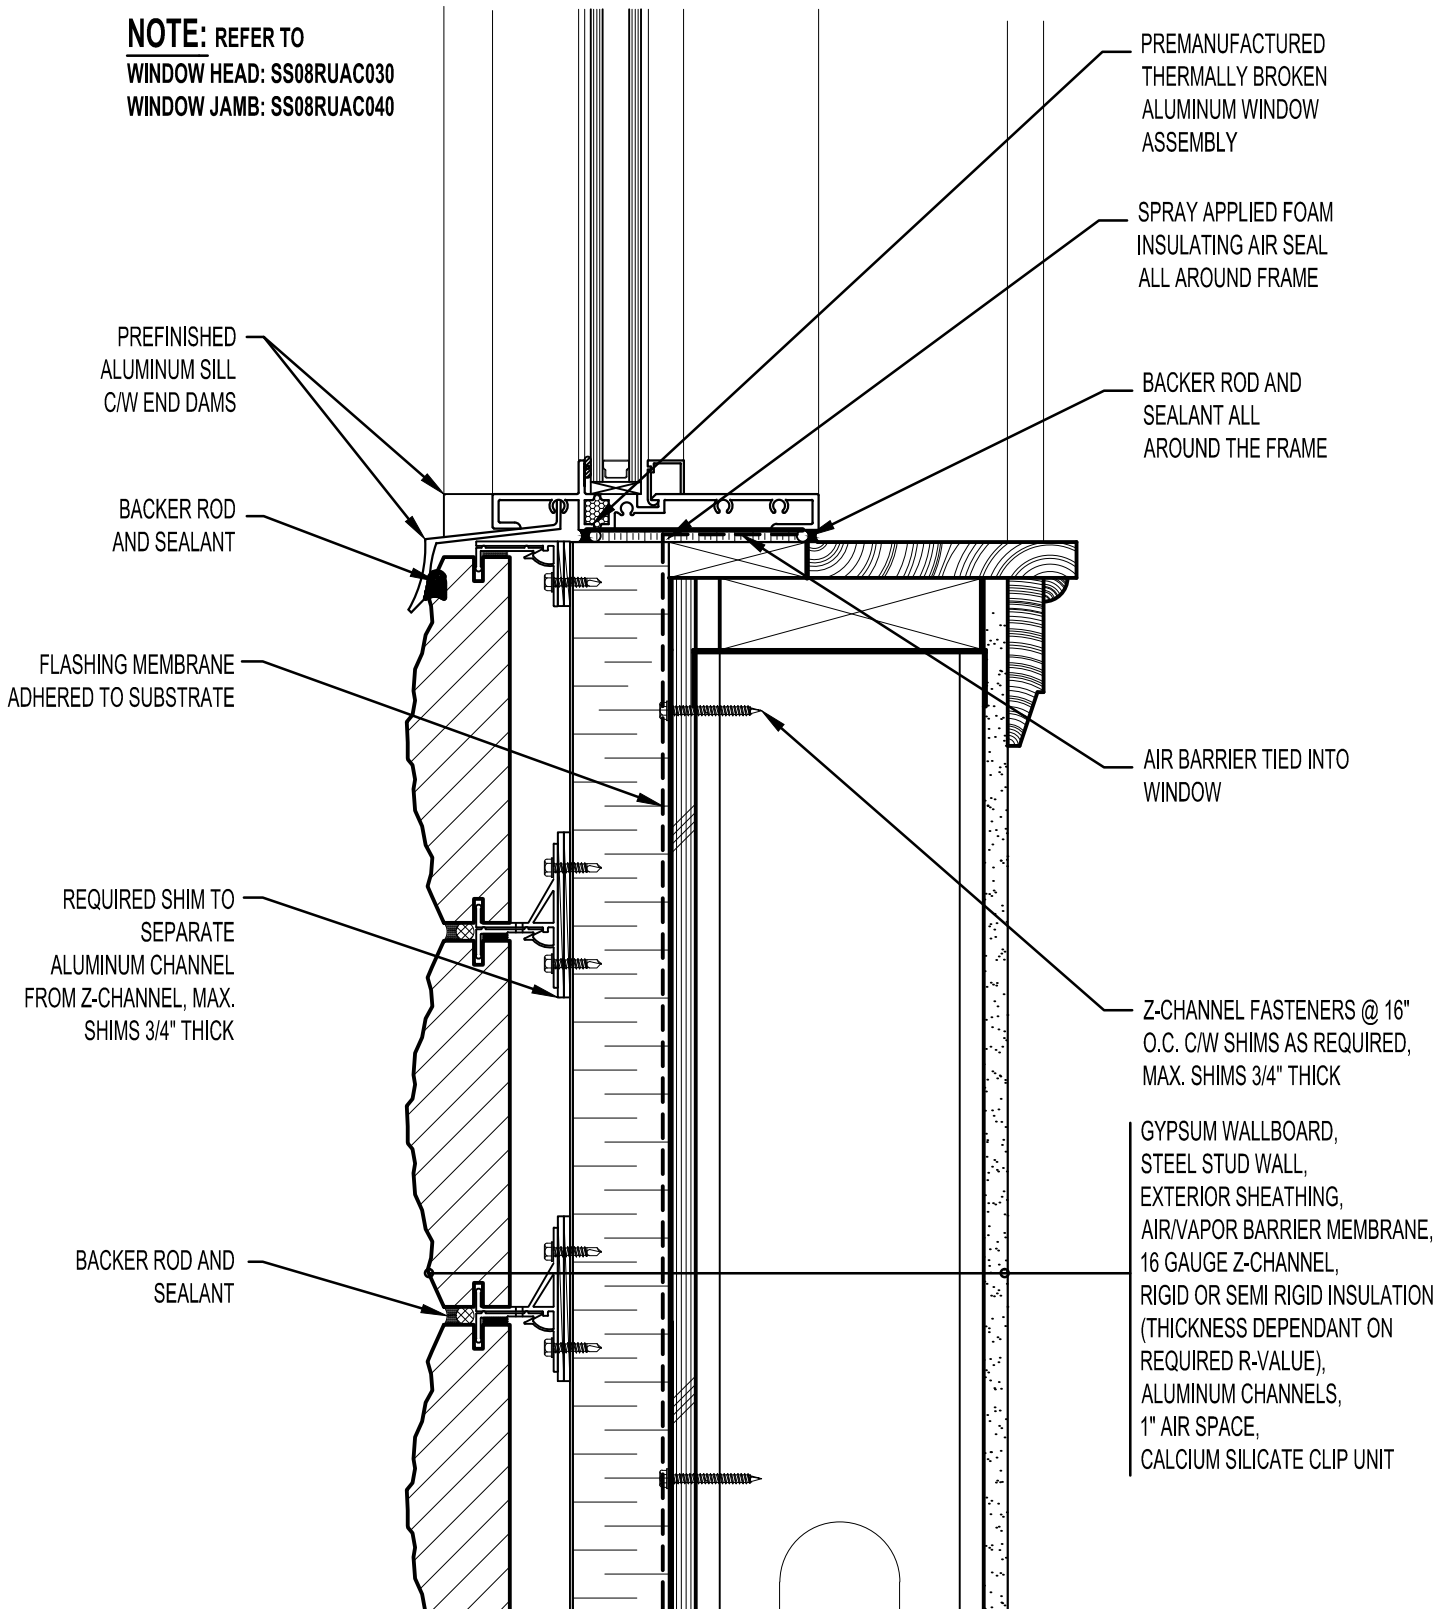

PREMANUFACTURED
 THERMALLY BROKEN
 ALUMINUM WINDOW
 ASSEMBLY

SPRAY APPLIED FOAM
 INSULATING AIR SEAL
 ALL AROUND FRAME

BACKER ROD AND
 SEALANT ALL
 AROUND THE FRAME

AIR BARRIER TIED INTO
 WINDOW

Z-CHANNEL FASTENERS @ 16"
 O.C. C/W SHIMS AS REQUIRED,
 MAX. SHIMS 3/4" THICK

GYPSUM WALLBOARD,
 STEEL STUD WALL,
 EXTERIOR SHEATHING,
 AIR/VAPOR BARRIER MEMBRANE,
 16 GAUGE Z-CHANNEL,
 RIGID OR SEMI RIGID INSULATION
 (THICKNESS DEPENDANT ON
 REQUIRED R-VALUE),
 ALUMINUM CHANNELS,
 1" AIR SPACE,
 CALCIUM SILICATE CLIP UNIT



ARRISCRAFT
 INTERNATIONAL
 BUILDING STONE • BRICK • LIMESTONE

ARRISCRAFT • CADD

TITLE:
**ALUMINUM WINDOW
 SILL**

DATE DRAWN:
 01/15/12

SCALE:
 3"=1'-0"

DRAWN BY:
 D.D.N.

DETAIL No:
 SS 08RU

AC020