

THIN-CLAD CALCIUM SILICATE TILE,  
 MVIS™ HI-BOND VENEER MORTAR -  
 POLYMER FORTIFIED,  
 PROGUARD DP® INSULATED CONCRETE  
 BOARD PANEL - DOUBLE DRAINAGE  
 PLANE (THICKNESS DEPENDENT ON  
 REQUIRED R-VALUE),  
 MVIS™ AIR & WATER BARRIER or  
 WATERARMOR® AWB,  
 EXTERIOR SHEATHING,  
 STEEL STUD WALL,  
 VAPOR BARRIER (LOCATION  
 DEPENDENT ON CLIMATE ZONE),  
 GYPSUM WALLBOARD


MVIS™ POINTING MORTAR

INSULATION CHAMFERED AT TOP  
 AND BOTTOM OF PANEL EDGES TO  
 ALLOW FOR CONTINUOUS DRAINAGE

3" MAX.  
 3" MAX.

TAPE JOINT WITH ALKALI-RESISTANT  
 MESH TAPE AND MUD JOINT WITH  
 MVIS™ HI-BOND VENEER MORTAR

ATTACH PROGUARD DP® PANELS  
 WITH SILVER C APPROVED SCREWS  
 THROUGH TO STUDS (TYPICAL)

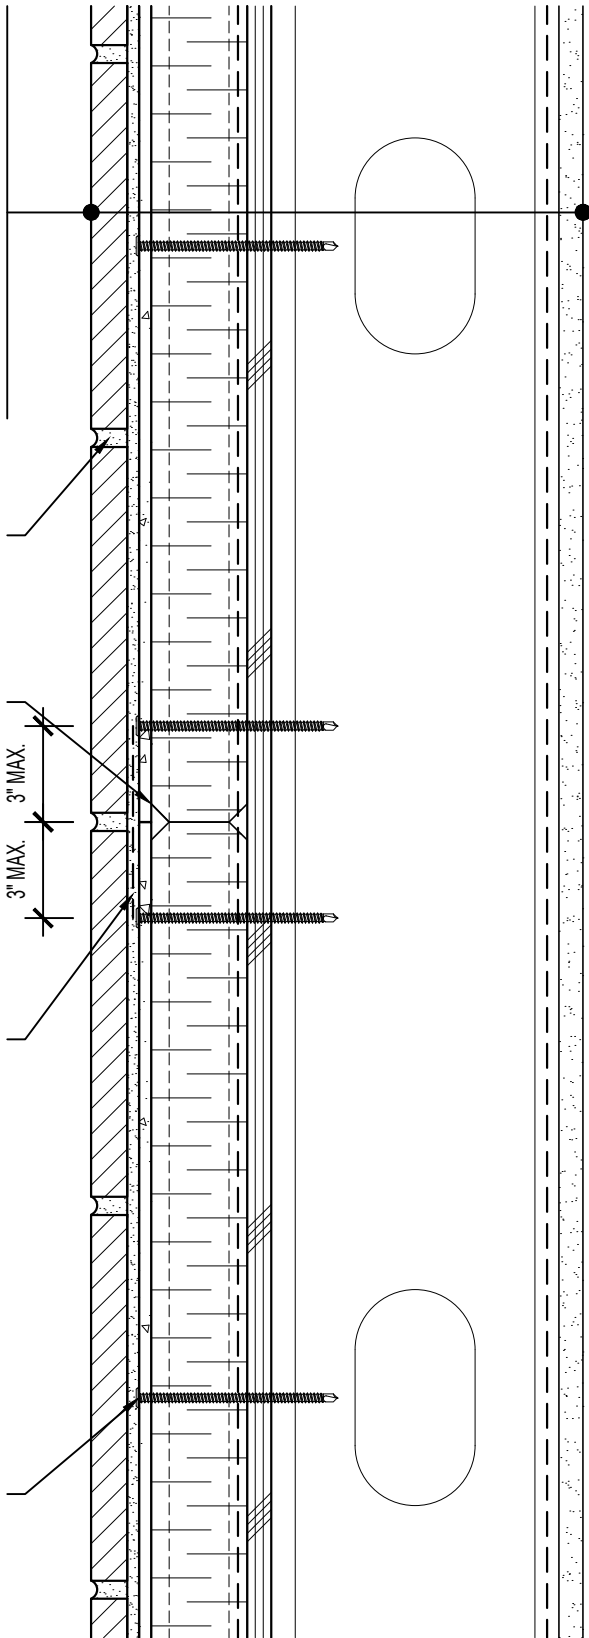

**ARCHITECT NOTE:**

- DETAIL FOR SUPPORTED PROGUARD DP® - DOUBLE DRAINAGE PLANE PANELS.
- ENGINEER OF RECORD TO SELECT PROGUARD DP® SCREW SPACING USING NTA REPORT TRIG030116-28.



**ARRISCRAFT-CADD**

DETAIL No:  
 SS08SAT - DP2S

TITLE:  
 PROGUARD DP®  
 PANEL DETAIL

**U080**

DATE DRAWN: 16 Jan 2021	SCALE: 3"=1'-0"	DRAWN BY: TRI
----------------------------	--------------------	------------------