

CALCIUM SILICATE MASONRY UNIT (CSMU),
 MIN. 1" AIR SPACE,
 RIGID OR SEMI-RIGID INSULATION (THICKNESS DEPENDANT ON REQUIRED R-VALUE),
 AIR/VAPOR BARRIER MEMBRANE,
 EXTERIOR SHEATHING,
 STEEL STUD WALL,
 GYPSUM WALLBOARD.

INSULATION RETAINER

ADJUSTABLE WALL TIE

MORTAR DROP CONTROL

FLASHING MEMBRANE SURFACE ADHERE TO SUBSTRATE


UNOBSTRUCTED WEEP SYSTEM @ 24" O/C

PREFINISHED METAL DRIP EDGE SET ON TWO BEADS OF SEALANT

COMPRESSIBLE BACKER ROD AND SEALANT

STEEL TRACK FASTENER (SCREW SIZE IS DETERMINED BY LOAD SUPPORTED)

STEEL TRACK

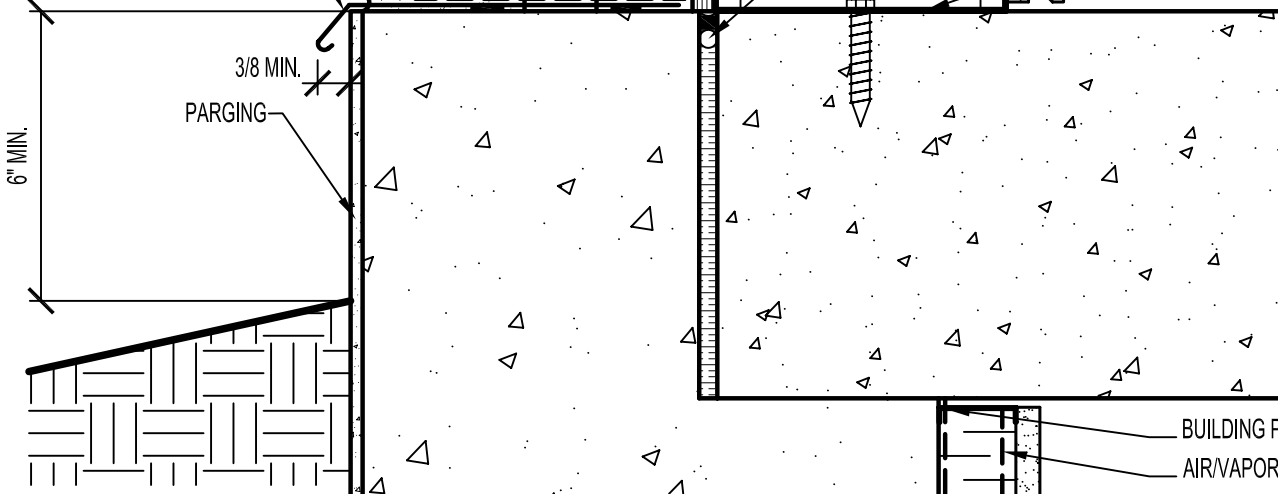

ARRISCRAFT
 INTERNATIONAL
 BUILDING STONE • BRICK • LIMESTONE

ARRISCRAFT • CADD

TITLE:

FOUNDATION TO WALL
 JUNCTION WITH SOIL

DATE DRAWN:
 08/30/04

SCALE:
 3"=1'-0"

DRAWN BY:
 LPS

DETAIL No:

SS 12S

U000